

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

CORRECTED VERSION

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
14 October 2004 (14.10.2004)

PCT

(10) International Publication Number  
**WO 2004/088387 A1**

(51) International Patent Classification?: **G02B 21/16**,  
21/06, 21/00

(72) Inventors; and

(21) International Application Number:  
PCT/IB2004/000976

(75) Inventors/Applicants (for US only): **ANGELINI, Marco**  
[IT/IT]; Via Milano, 20, I-27021 Bereguardo (IT). **BAR-**  
**ALDO, Natale** [IT/IT]; Via San Martino, 22/a, I-20037  
Paderno Dugnano (IT). **BIGLIATI, Claudia** [IT/IT];  
Via Montenero, 18, I-13039 Trino (IT). **SCODES, Luca**  
[IT/IT]; Via Mazzini, 90, I-20079 Sant'Angelo Lodigiano  
(IT).

(22) International Filing Date: 31 March 2004 (31.03.2004)

(25) Filing Language: Italian

(26) Publication Language: English

(74) Agents: **JORIO, Paolo et al.**; Studio Torta S.r.l., Via  
Viotti, 9, I-10121 Torino (IT).


(30) Priority Data:  
MI2003A000650 2 April 2003 (02.04.2003) IT

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,

(71) Applicant (for all designated States except US): **FRAEN**  
**CORPORATION S.R.L.** [IT/IT]; Via Senato, 20, I-20121  
Milano (IT).

[Continued on next page]

(54) Title: **LIGHTING ASSEMBLY FOR A LUMINESCENCE ANALYSIS APPARATUS, IN PARTICULAR A FLUORESCENCE MICROSCOPE, AND LUMINESCENCE ANALYSIS APPARATUS EQUIPPED WITH SUCH A LIGHTING ASSEMBLY**

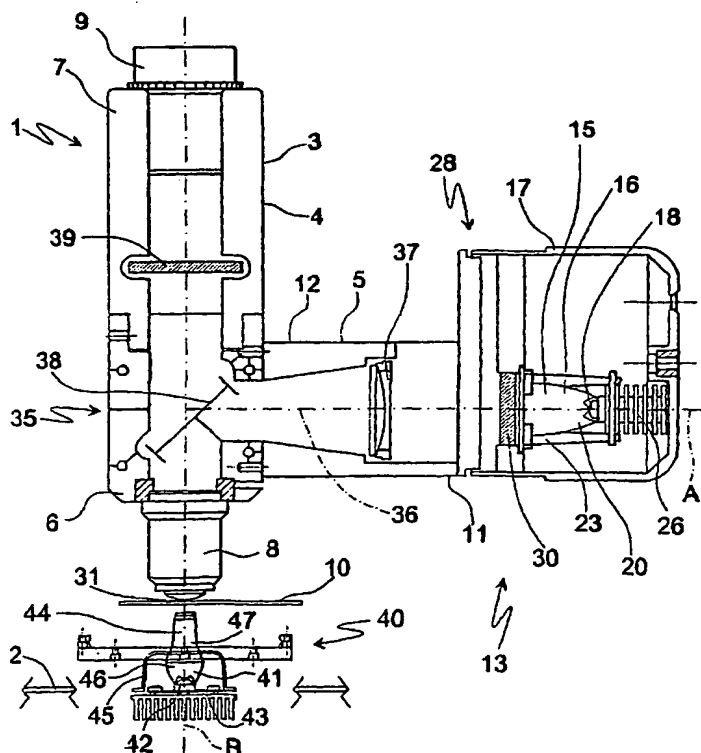

(57) Abstract: A luminescence analysis apparatus (1), in particular for fluorescence microscopy, has a lighting assembly (13) having a lighting unit (15) which includes a preassembled module (16) housed inside a housing (17); the module (16) is defined by a LED (18) mounted on a plate (19), and by an optical collimating element (20) connected integrally to the LED (18) and located in close proximity to the LED (18); the optical element (20) is a catadioptric collimator made of transparent plastic material and designed to internally convey and transmit the light emitted by the LED (18), so as to generate a substantially parallel beam of light rays which is directed onto a luminescent sample (31) for analysis.

WO 2004/088387 A1



MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

**Published:**

— with international search report

(48) Date of publication of this corrected version:

17 February 2005

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(15) Information about Correction:

see PCT Gazette No. 07/2005 of 17 February 2005, Section II

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

3/pet  
JC20 Rec'd PET/PTO 30 SEP 2009

5

LIGHTING ASSEMBLY FOR A LUMINESCENCE ANALYSIS APPARATUS,  
IN PARTICULAR A FLUORESCENCE MICROSCOPE, AND LUMINESCENCE  
ANALYSIS APPARATUS EQUIPPED WITH SUCH A LIGHTING ASSEMBLY

10

TECHNICAL FIELD

The present invention relates to a lighting assembly  
for a luminescence analysis apparatus, in particular a  
fluorescence microscope, and to a luminescence analysis  
15 apparatus, in particular for fluorescence microscopy,  
comprising such a lighting assembly.

BACKGROUND ART

As is known, in fluorescence microscopy, the sample  
contains a fluorescent substance (contained naturally in  
20 or introduced into the sample) which, when struck and  
excited by a light beam in a given spectral band, itself  
fluoresces in a different (higher-wavelength) spectral  
band. Emission by the sample is then collected by a  
special device and observed directly in an eyepiece.

25 As fluorescence analysis normally calls for intense  
illumination of the sample, concentrated in a small area,  
known fluorescence microscopes employ high-efficiency  
light sources, typically short-arc discharge or halogen

lamps or laser sources.

Microscopes equipped with light sources of this type, however, have various drawbacks. In particular, conventional discharge or halogen lamps are relatively expensive, consume a large amount of energy, and are of short life. Moreover, lamps of this sort emit in wide bands, normally also extending to ultraviolet and/or infrared, so that, besides heating and possibly deteriorating samples by radiation, heavy filters are required, in that only a small emission band (capable of exciting the fluorescent substance) must reach the sample. In any case, the percentage of effective light (i.e. reaching the sample) is very small (less than 10%). Moreover, discharge and halogen lamps call for complex electronics for controlling turn-on and discharge, and relatively complex, i.e. high-cost, optical systems for concentrating emission on the small area of interest. Finally, lamps of this sort, and therefore the microscope as a whole, are normally fairly bulky, so that portable, or at least small-size, apparatuses are impossible to achieve. This problem is further compounded by the high energy consumption of the lamps, which cannot be battery-powered.

Fluorescence microscopes equipped with laser sources also have some of these drawbacks, on account of laser sources in particular being fairly complex, expensive and bulky.

Similar drawbacks are also found in other types of

fluorescence and luminescence analysis equipment in general, as used for example in spectrophotometry, fluorometry, etc.

In other words, compact (portable), low-cost, low-power fluorescence microscopes or luminescence analysis equipment in general are not currently available.

#### DISCLOSURE OF INVENTION

It is an object of the present invention to provide a luminescence analysis apparatus, in particular a fluorescence microscope, designed to eliminate the aforementioned drawbacks of the known art.

In particular, it is an object of the invention to solve the aforementioned problems by providing a lighting assembly for a luminescence analysis apparatus, in particular a fluorescence microscope.

In particular, it is an object of the invention to provide a fluorescence microscope, and a luminescence analysis apparatus in general, which is compact (at least portable), and which is cheap and easy to produce and use.

According to the present invention, there is provided a lighting assembly for a luminescence analysis apparatus, in particular a fluorescence microscope, as defined in the accompanying Claim 1.

The invention also relates to a luminescence analysis apparatus, in particular for fluorescence microscopy, comprising such a lighting assembly.

The apparatus equipped with the lighting assembly

according to the invention eliminates the aforementioned drawbacks of the known art by being, in particular, highly compact and cheap to produce. Moreover, LEDs consume much less energy, are more efficient, and have a much longer life (typically over 50000 hours, as compared with the 100-1000 hours of conventional lamps) than sources normally used in luminescence analysis equipment.

Moreover, LEDs emit in narrow bands and can be selected to meet specific requirements, so that simpler, cheaper, or high-quality filters can be used (the signal/noise ratio, in fact, is higher than in lamp systems, in that LEDs, unlike lamps, have very low off-band emissions which can therefore be filtered effectively). In any case, the percentage of light actually directed onto the sample is much higher than in known solutions, and there is no problem of overheating the apparatus or samples.

#### BRIEF DESCRIPTION OF THE DRAWINGS

A number of non-limiting embodiments of the present invention will be described by way of example with reference to the accompanying drawings, in which:

Figure 1 shows a simplified, schematic view of a luminescence analysis apparatus, in particular a fluorescence microscope, in accordance with the invention;

Figure 2 shows a schematic, larger-scale, partly sectioned view of a detail of the Figure 1 apparatus;

Figure 3 shows a quality graph illustrating the

emission curve of a LED and the absorption curve of an excitation filter, both forming part of the Figure 1 apparatus;

Figure 4 shows a simplified, partly sectioned, schematic view of a further embodiment of the apparatus according to the invention;

Figures 5 and 6 show partial schematic views, with parts removed for clarity, of respective details of the Figure 4 apparatus.

10 BEST MODE FOR CARRYING OUT THE INVENTION

Number 1 in Figure 1 indicates as a whole a luminescence analysis apparatus. In the example shown, apparatus 1 is an apparatus for fluorescence microscopy, i.e. an incident-light fluorescence microscope hereinafter referred to, for the sake of simplicity, as microscope 1.

Microscope 1 comprises a base structure 2, shown only schematically in Figure 1, which in turn comprises casing 3 having a tubular main body 4, from which projects a tubular lateral body 5. Two axially opposite ends 6, 7 of main body 4 are fitted respectively with an objective 8 and an eyepiece 9, both of which are substantially known; and a known sample support 10 is located opposite objective 8.

25 A free end 11 of lateral body 5, opposite an end 12 attached to main body 4, is fitted with a lighting assembly 13, which comprises a lighting unit 15 having a preassembled module 16 housed inside a housing 17.

As shown in more detail in Figure 2, module 16 comprises a LED (light-emitting diode or similar solid-state light source) 18 mounted on a plate 19; and an optical collimating element 20 fitted integrally and in close proximity to LED 18.

Optical element 20 is a complex-surface catadioptric collimator made of transparent plastic material (e.g. polycarbonate PC or polymethyl methacrylate PMMA), is substantially cup-shaped, extends along a central axis A of symmetry, and is bounded by a surface 21 of revolution constituting an internal reflection surface of optical element 20. LED 18 is housed inside a recess 22 formed at one axial end of optical element 20; and optical element 20 is designed to internally convey and transmit the light emitted by LED 18, so as to generate a substantially parallel beam of light rays.

Optical element 20 is supported to project from plate 19 by means of a supporting structure 23, which comprises a number of rods 24 projecting, substantially parallel to axis A, from a peripheral edge 25 of optical element 20. Rods 24 are spaced circumferentially apart along peripheral edge 25 to ensure effective ventilation of LED 18, and are fitted integrally in any known manner to plate 19 which, in turn, is fixed to a known dissipator 26 connected integrally to a wall of housing 17. Surface 21 is covered by a shell 27 formed, for example, in one piece with supporting structure 23.

The electric connections of LED 18 to a power source



(external mains or a battery on base structure 2) are not shown for the sake of simplicity.

Housing 17 has means 28 for connection to base structure 2, and specifically to casing 3, and which, though shown only schematically in Figure 1 as joints for the sake of simplicity, may be of any known type. Preferably, means 28 are releasable to open housing 17 (i.e. for access to module 16) or to remove housing 17 completely from casing 3.

Lighting unit 15 also comprises an excitation filter 30 housed inside housing 17 and located opposite optical element 20, on the opposite side to LED 18. Excitation filter 30 is interposed between optical element 20 and support 10 to select a given band for transmission to a luminescent (in particular, fluorescent) sample 31 on support 10. More specifically, excitation filter 30 is a band-pass filter which permits the passage of light of a wavelength in a predetermined band. As shown only qualitatively in the Figure 3 graph (which shows wavelength along the x axis and transmission quality along the y axis), said band is superimposed on the emission band of LED 18 and located about a peak of the emission curve of LED 18.

Casing 3 houses optical means, indicated as a whole by 35, for defining an optical path 36 between lighting unit 15 and support 10, and which direct the light beam, generated by lighting unit 15, onto sample 31 in the same way as in conventional fluorescent microscopes. More

specifically, optical means 35 comprise a lens 37 facing lighting unit 15 and located downstream from excitation filter 30 along optical path 36; and a dichroic plate 38 interposed between lens 37 and objective 8 and tilted with respect to axis A. An emission filter 39 is located between dichroic plate 38 and eyepiece 9 to filter the light emitted by sample 31 before it reaches eyepiece 9 (or any other known device for collecting emission by sample 31).

10 Beneath support 10, i.e. on the opposite side of support 10 to dichroic plate 38, an optional secondary lighting unit 40 may be provided for direct optical observation of sample 31 in transmitted or diffused light. Lighting unit 40 comprises a preassembled module 15 41, in turn comprising a LED 42 mounted on a plate 43; and a total internal reflection condenser 44 supported to project from plate 43 by a supporting structure 45, and fitted integrally and in close proximity to LED 42.

Condenser 44 is designed to internally convey and 20 transmit the light emitted by LED 42, so as to generate a converging beam of light rays concentrated on sample 31. More specifically, condenser 44 has a body of revolution made of transparent plastic material, extends longitudinally along a central axis B of symmetry, and, 25 at opposite axial ends, comprises a bulb-shaped portion 46 with a convex lateral surface and a recess for housing LED 42; and a substantially cylindrical portion 47.

Alternatively (as shown in the Figure 4 example),

lighting unit 40 comprises a module 41 identical with module 16 described previously.

In actual use, the light emitted by LED 18 is conveyed highly efficiently in a parallel beam of light rays from optical element 20, and through excitation filter 30. By virtue of LED 18 emitting in a band which is in itself narrow and largely superimposed on the band allowed through by excitation filter 30, the percentage of light transmitted through excitation 30 is very high (roughly about 70%). The filtered light rays are then reflected by dichroic plate 38 through objective 8 onto sample 31, which fluoresces and emits light which travels through objective 8, dichroic plate 38, and emission filter 39 to eyepiece 9 where it is observed.

Two or more interchangeable integrated lighting units 15 of the type described above may advantageously be provided, comprising respective housings 17 housing respective preassembled modules 16 and respective excitation filters 30. Modules 16 comprise respective LEDs 18 having respective different emission bands; and respective optical collimating elements 20 connected integrally to LEDs 18 and shaped to direct respective substantially parallel beams of light rays onto optical means 35. Housings 17 of respective integrated lighting units 15 have respective releasable means 28 for attachment to base structure 2, so that each lighting unit 15 can be removed from base structure 2 and replaced with a different lighting unit 15. Alternatively,

provision may be made for only changing modules 16 inside a single housing 17.

In the preferred embodiment shown in Figures 4 to 6, in which details similar to or identical with those already described are indicated using the same reference numbers, microscope 1 is equipped with a lighting assembly 13 comprising a housing 17 having releasable means 28 for attachment to base structure 2; at least one lighting unit 15; and at least one preassembled optical unit 50 associated with lighting unit 15 and housed, downstream from lighting unit 15, inside housing 17.

Lighting unit 15 is of the type described above. Optical unit 50 comprises a hollow, prismatic (e.g. substantially cubic) supporting body 51; a dichroic plate 38 housed inside supporting body 51, substantially facing optical element 20, and tilted with respect to the beam from optical element 20; and an emission filter 39 fitted to supporting body 51. Supporting body 51 has an entrance opening 52 and two opposite exit openings 53, 54, which are arranged in a T and formed in respective perpendicular faces of supporting body 51. In actual use, entrance opening 52 faces lighting unit 15, and exit openings 53, 54 face objective 8 (i.e. sample 31) and eyepiece 9 respectively. Dichroic plate 38 is interposed between entrance opening 52 and exit openings 53, 54, and is tilted with respect to the faces of supporting body 51 in which entrance opening 52 and exit openings 53, 54 are formed. Dichroic plate 38 is designed and located so that

the light coming from lighting unit 15 through entrance opening 52 is diverted to exit opening 53, while the light from exit opening 53 travels through dichroic plate 38 to exit opening 54. Emission filter 39 is associated with and substantially closes exit opening 53.

In the example shown, lighting assembly 13 comprises a number of (in particular, three) interchangeable lighting units 15; a number of (in particular, three) interchangeable optical units 50; and selecting means 55 for selectively associating a lighting unit 15 with an optical unit 50.

Selecting means 55 may be of any substantially known type, and are therefore not shown or described in detail for the sake of simplicity. Generally speaking, selecting means 55 comprise a structure 61 supporting lighting units 15; and a structure 62 supporting optical units 50; and structures 61 and 62 are movable with respect to housing 17 to selectively position an optical unit 50 and a lighting unit 15 facing each other.

More specifically, structure 61 is a carousel structure, on which the three lighting units 15 are arranged with respective modules 16 parallel and spaced  $120^\circ$  apart about a central axis C, is fitted, so as to rotate about axis C, to a plate 63 fixed (in known manner) to base structure 2, and is movable manually, e.g. by means of a lever 64.

Structure 62 is a slide running along a slide axis T perpendicular to axis C, supports optical units 50 side

by side, is mounted to run along guides 65 fixed to housing 17, and is movable manually, e.g. by means of a lever 66.

Lighting units 15 comprise respective LEDs 18 having  
5 respective different emission bands (e.g. three LEDs emitting red, green, and blue light respectively); and known control means 70 (shown only schematically in Figure 5) are provided to selectively activate lighting units 15 as required.

10 The general structure described herein for a microscope 1 may obviously also be applied to a different type of fluorescence or luminescence analysis apparatus in general, e.g. for spectrophotometry, fluorometry, etc.

Clearly, the lighting assembly according to the  
15 invention may be installed on microscopes and commercial fluorescence analysis equipment in general, in lieu of conventional light sources, and may also be installed on conventional white- or transmitted-light microscopes, thus converting them, in fact, into fluorescence  
20 microscopes.

## CLAIMS

1) A lighting assembly (13) for a luminescence analysis apparatus (1), in particular a fluorescence microscope, comprising a housing (17) connectable to a base structure (2) of the apparatus (1) and housing at least one light source (18); the lighting assembly being characterized by comprising at least one integrated lighting unit (15), in turn comprising a LED (18) defining said light source, and an optical collimating element (20) associated with the LED (18) to convey the light generated by the LED (18) in a substantially parallel beam of light rays.

2) A lighting assembly as claimed in Claim 1, characterized in that the lighting unit (15) comprises an excitation filter (30) located opposite the optical element (20), on the opposite side to the LED (18), to select a predetermined emission band of the LED (18).

3) A lighting assembly as claimed in Claim 2, characterized in that said excitation filter (30) is a band-pass filter.

4) A lighting assembly as claimed in Claim 3, characterized in that said excitation filter (30) permits the passage of light of a wavelength within a band superimposed on the emission band of the LED (18) and located about a peak of the LED emission curve.

5) A lighting assembly as claimed in one of Claims 2 to 4, characterized by comprising an optical unit (50)

associated with the lighting unit (15) and located downstream from the excitation filter (30) inside the housing (17); the optical unit (50) comprising a dichroic plate (38) substantially facing the optical element (20) and tilted with respect to the beam from the optical element (20).

6) A lighting assembly as claimed in Claim 5, characterized in that the optical unit (50) comprises a hollow supporting body (51) having an entrance opening (52) and two opposite exit openings (53, 54); said dichroic plate (38) being housed in the supporting body (51) and interposed between the entrance opening (52) and the exit openings (53, 54).

7) A lighting assembly as claimed in Claim 6, characterized in that the optical unit (50) comprises an emission filter (39) carried by said supporting body (51) and associated with a first exit opening (53).

8) A lighting assembly as claimed in one of Claims 5 to 7, characterized by comprising two or more interchangeable lighting units (15) and/or two or more interchangeable optical units (50).

9) A lighting assembly as claimed in Claim 8, characterized by comprising selecting means (55) for selectively associating a lighting unit (15) with an optical unit (50).

10) A lighting assembly as claimed in Claim 9, characterized in that said selecting means (55) comprise a movable first structure (61) supporting the lighting



units (15); and a movable second structure (62) supporting the optical units (50); said structures (61, 62) being movable with respect to the housing (17) to selectively position a lighting unit (15) and an optical  
5 unit (50) substantially facing each other.

11) A lighting assembly as claimed in any one of the foregoing Claims, characterized in that the optical element (20) is located in close proximity to the LED (18), and is connected integrally to the LED (18) to  
10 define a preassembled module (16).

12) A lighting assembly as claimed in any one of the foregoing Claims, characterized in that the optical element (20) is a complex-surface catadioptric collimator.

15 13) A lighting assembly as claimed in any one of the foregoing Claims, characterized by comprising releasable means (28) for attaching the housing (17) to the base structure (2).

14) A luminescence analysis apparatus (1), in  
20 particular for fluorescence microscopy, characterized by comprising a lighting assembly (13) as claimed in any one of the foregoing Claims.

15) An apparatus as claimed in the foregoing Claim, characterized by comprising a sample support (10); and  
25 optical means (35) for directing the light generated by the lighting assembly (13) onto a luminescent sample (31) on the support.

1 / 3

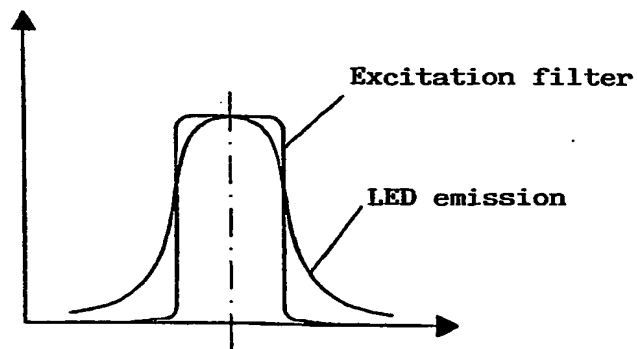


Fig.3




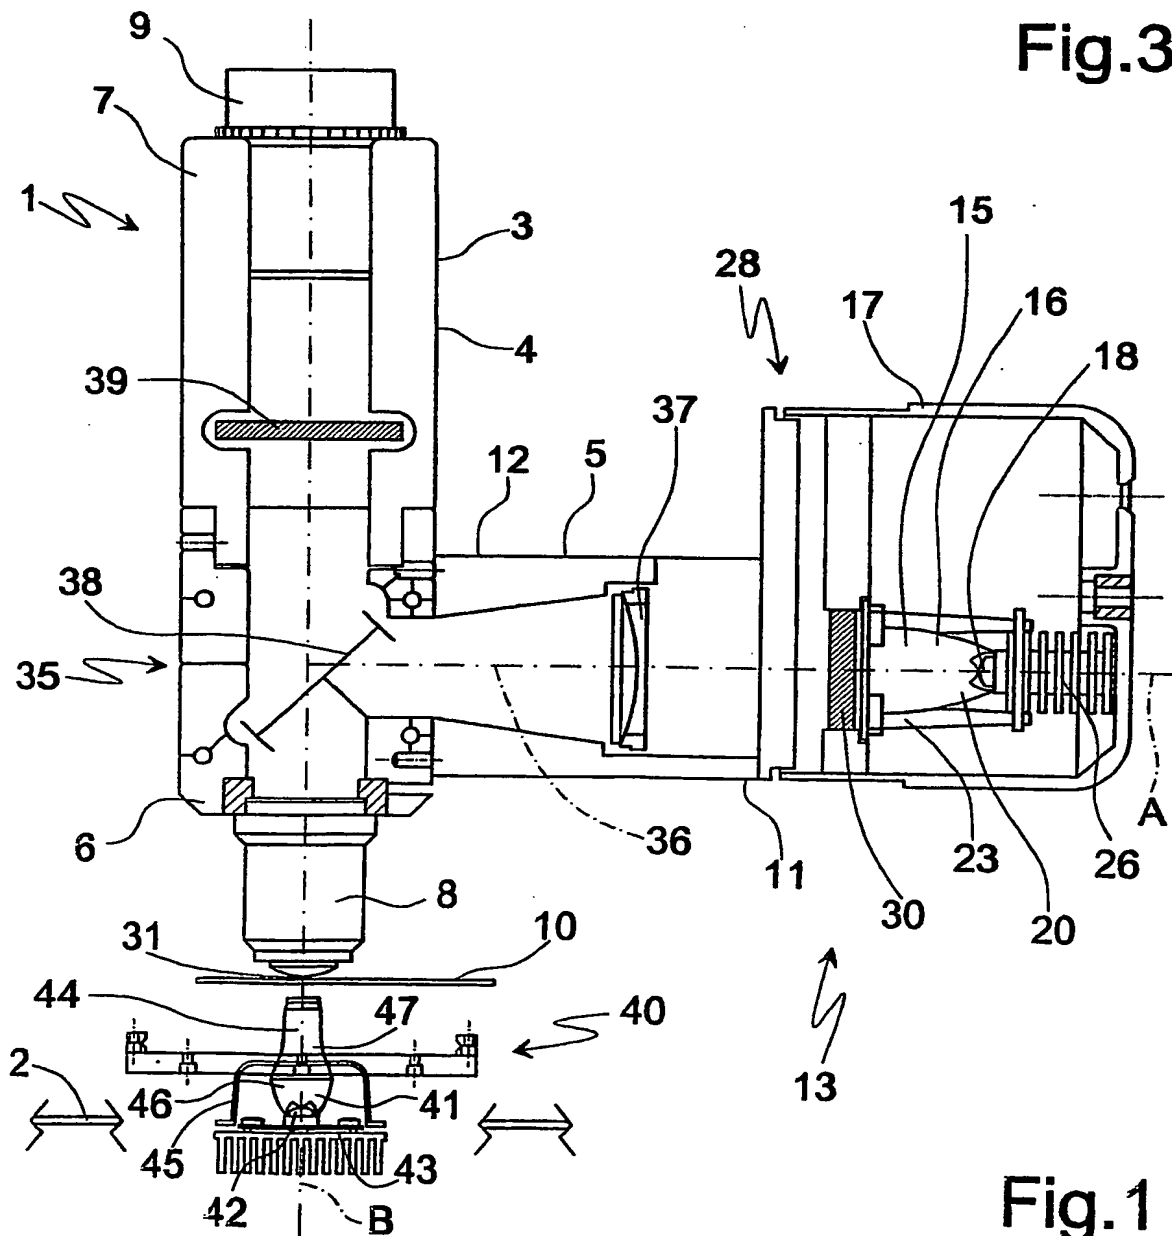



Fig.1

2 / 3

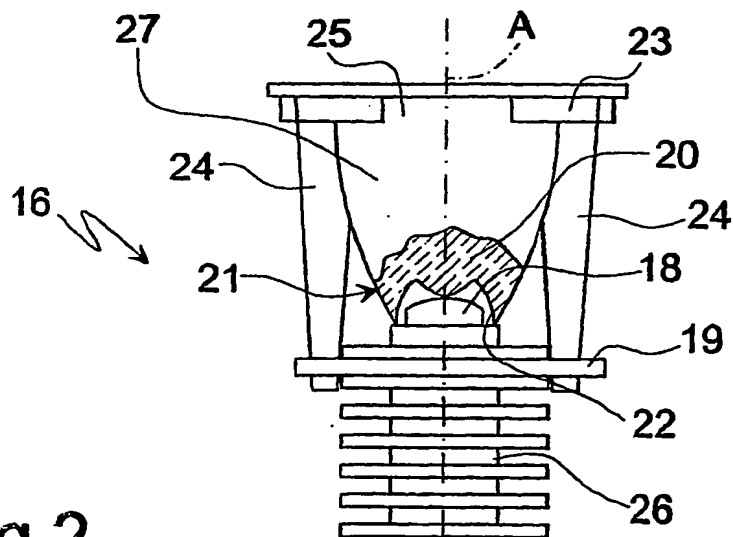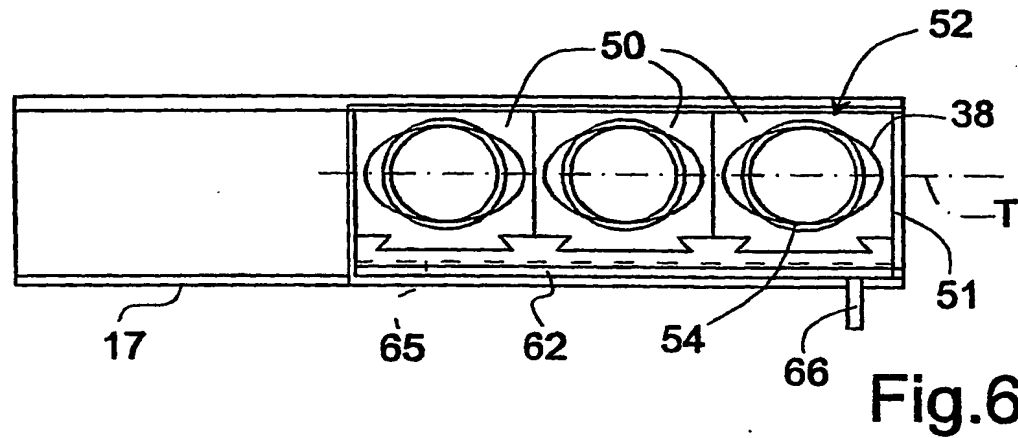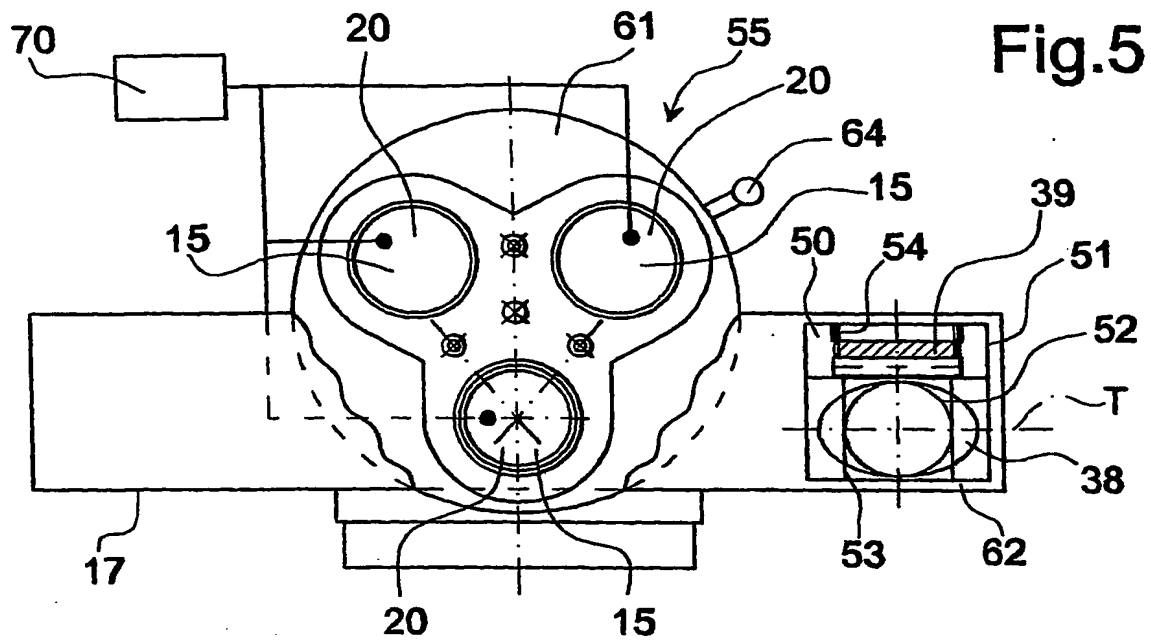

3 / 3

Fig.4

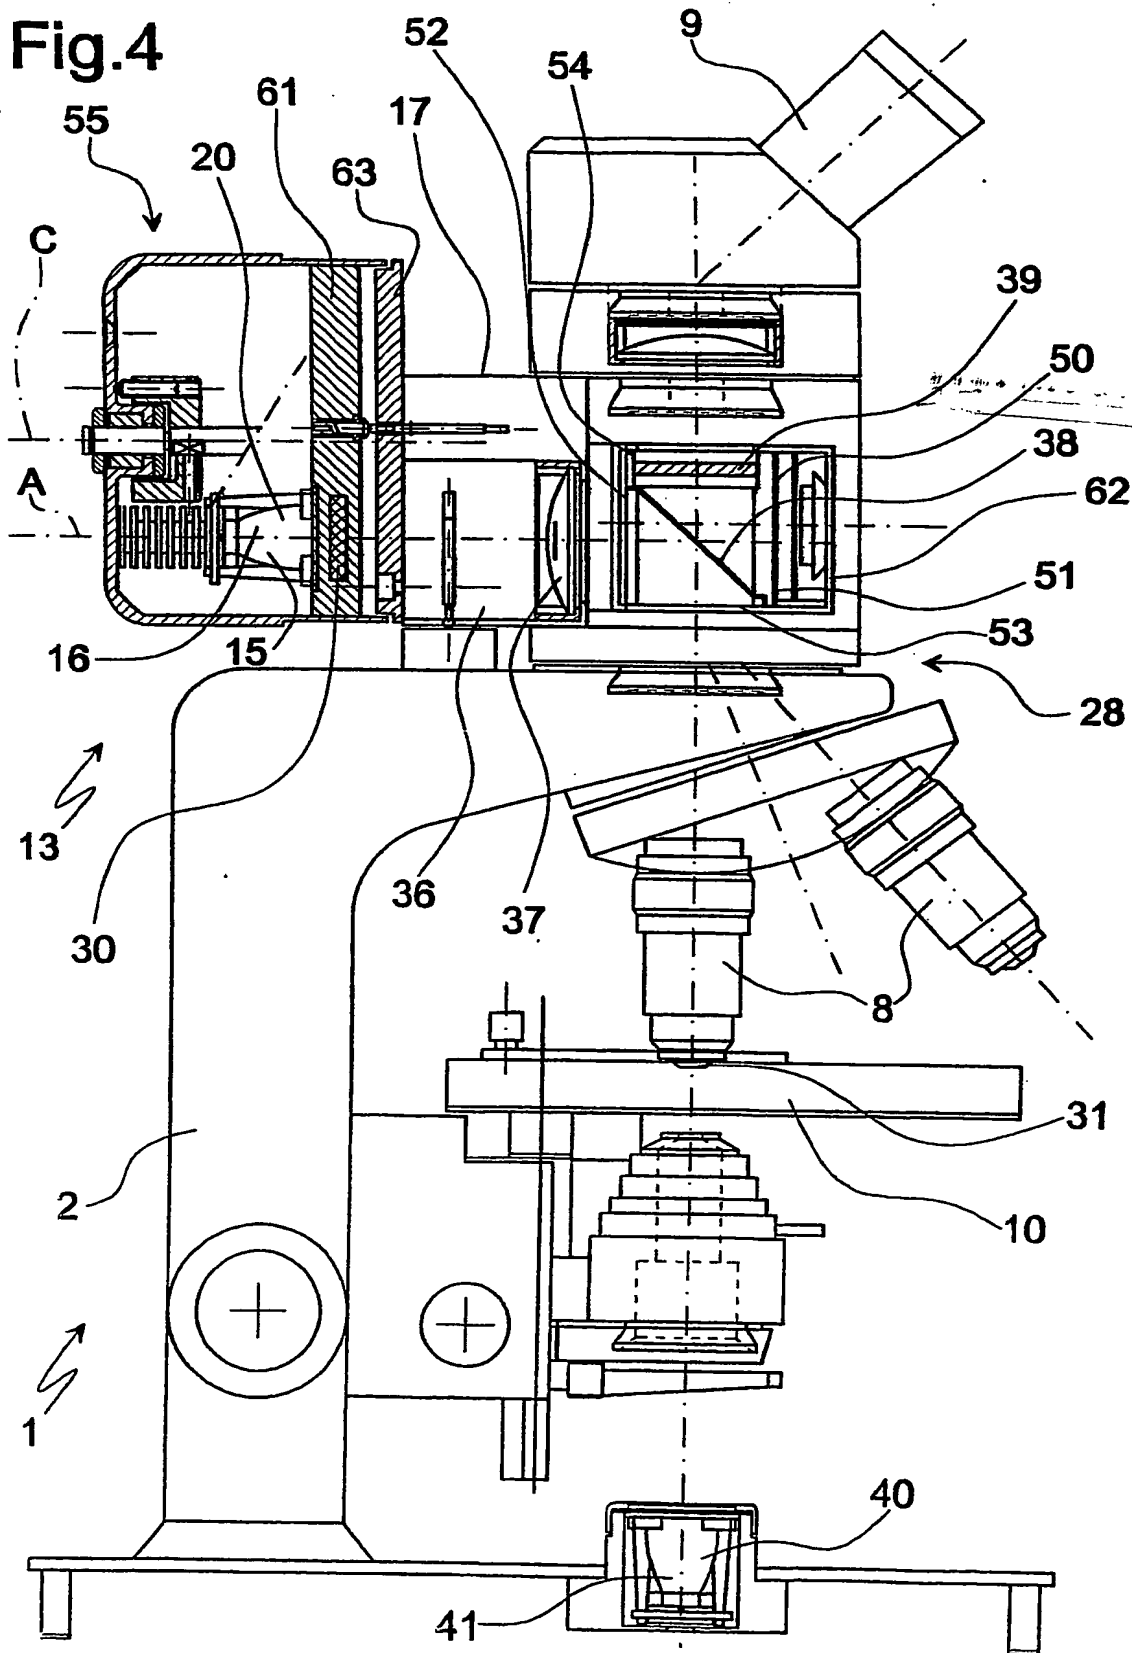

# INTERNATIONAL SEARCH REPORT

Int. Application No  
PCT/IB2004/000976

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 G02B21/16 G02B21/06 G02B21/00

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 154 282 A (PENNEFATHER PETER S ET AL) 28 November 2000 (2000-11-28) column 2, line 66 - column 4, line 51; figure 1	1-15
X	WO 01/61324 A (BARSKY VICTOR ; VENGEROV YURI (RU); YERGOROV YEGOR (RU); MIRZABEKOV AN) 23 August 2001 (2001-08-23) page 3, line 29 - page 5, line 10 page 6, line 10 - page 8, line 3; figure 2  ----- -/-	1-15

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

3 August 2004

Date of mailing of the international search report

18/08/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Rödig, C

# INTERNATIONAL SEARCH REPORT

In onal Application No  
PCT/IB2004/000976

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>HERMAN P ET AL: "Frequency-domain fluorescence microscopy with the LED as a light source"</p> <p>J. MICROSC. (UK), JOURNAL OF MICROSCOPY, BLACKWELL SCIENCE, UK, vol. 203, pt.2, no. 8, 2001, pages 176-181, XP002290940</p> <p>ISSN: 0022-2720</p> <p>page 177, column 1 - page 178, column 2; figure 1</p>	1-15
X	<p>SILK E: "LED fluorescence microscopy in theory and practice"</p> <p>MICROSCOPE (USA), MICROSCOPE, MICROSCOPE PUBLICATIONS DIV, USA, vol. 50, no. 2-3, 2002, pages 101-118, XP009034782</p> <p>ISSN: 0026-282X</p> <p>figures 3,5</p>	1
P,X	<p>G. MAZZINI, N.BARALDO, M.ANGELINI: FOCUS ON MICROSCOPY, 'Online! 16 April 2003 (2003-04-16), XP002290942</p> <p>GENOVA, ITALY</p> <p>Retrieved from the Internet: URL:<a href="http://www.focusonmicroscopy.org/2003/index.html">http://www.focusonmicroscopy.org/2003/index.html</a>&gt; 'retrieved on 2004-08-02! abstract</p>	1

# INTERNATIONAL SEARCH REPORT

Int. Patent Application No  
PCT/IB2004/000976

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 6154282	A	28-11-2000	CA	2280398 A1	26-04-2000
WO 0161324	A	23-08-2001	RU	2182328 C2	10-05-2002
			AU	3705601 A	27-08-2001
			WO	0161324 A1	23-08-2001